


Video led Flex 3.91



	FLEX3.9
Pixel Pitch	3.9mm
Physical Density	65536dots/m ²
Module Size	500mm×250mm
Module Resolution	128x64
Cabinet Size	500(W)×500(H)×82(D)mm
Cabinet Resolution	128x128
Module Quality	2pcs
Cabinet Weight	Estimated: 8kg/pcs
LED Shape	SMD2020
Drive Mode	1/16 Scan
Brightness	≥1000cd/m ²
Contrast	3000:1
View Angle	140°(horz.), 140° (vert.)
Arc minimum diameter	2.2m
Minimum View Distance	4m
Gray Scale	≥16bits
Max Power Consumption(W/pcs)	210W
Average Power Consumption (W/pcs)	70W
Work Voltage	AC100-240V
Frame Frequency	60HZ
Refresh Rate	≥1920Hz
Driver IC	MBI5124
Brightness Adjustment	0-100%
Stock Temperature	(-40℃~+85℃)
Operating Temperature	(-20℃~+45℃)
Operating Humidity	10-90% RH
Certification	EMC
IP Rating	IP30 (Front) IP30 (Rear)

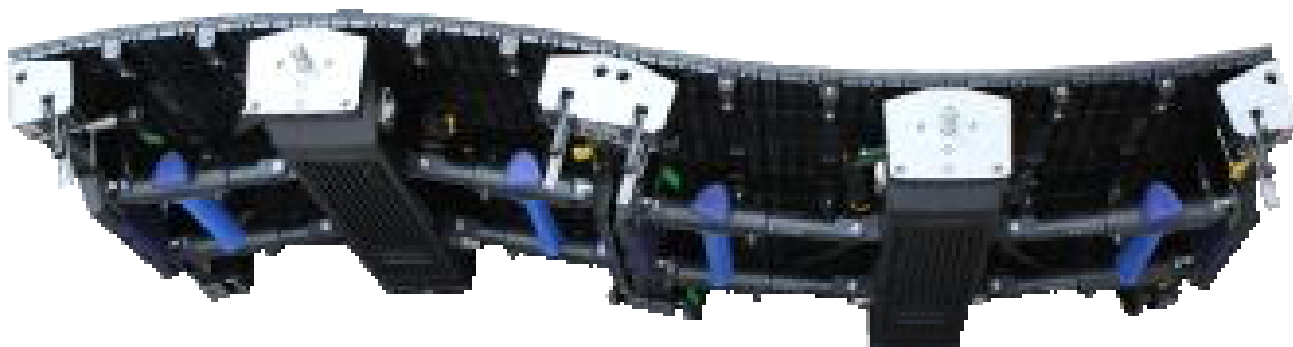

Video led Flex 3.91

