




Video led MX 1.9

Pixel pitch (mm)	1.95
LED Type	SMD 1515
Pixel m2	262144
Panel dimension (mm)	500 (W) x 500 (H) x 78(D)
Panel Res WxH (pixels)	256 x 256
Manufacturing Material	Die cast aluminium
Receiving card	Novastar A5S
Panel Weight (Kg)	7
Refresh Rate (Hz)	3840
Viewing Angle VxH(Deg)	140°/140°
Brightness	1000 nits
Operating temperature	-10 to 40 (C°)
IP Rating	IP30
Maintenance	Front and back service
Cabling system	CAT6
Management Sys	Novastar
Input power frequency	50 - 60 Hz
Input Voltage	100 ~ 240 Volt ±10%
Power Cons. (W/m2)	AWG 200
Power Cons. (W/m2)	Max 600



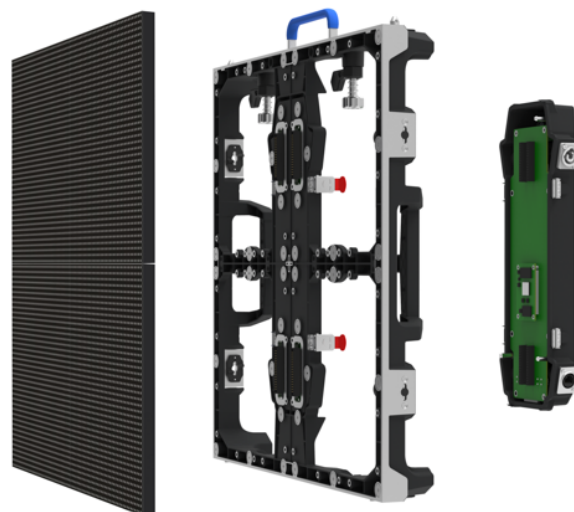

Module, cabinet frame and control box are three independent modules

Fashion · Concise · Artistic



Hanging up installation



Ground stack installation



4 in 1 Independent module



Front and rear maintenance



MODSART

YOUR TECHNOLOGY PARTNER

Commercializzato per l'Italia da Mods Art Srl
Via Marco Polo 44/46 - 66054 Vasto (CH)
www.modsart.it - info@modsart.it

I prodotti e tutte le informazioni contenute nel presente catalogo potrebbero subire modifiche senza preavviso