





Video led Comet RN3.9S


Pixel pitch (mm)	3,91
LED Type	SMD 3 IN 1 – SMD2020
Panel dimension (mm)	500 (W) x 500 (H) x 85(D) 500 (W) x 1000 (H) x 85(D)
Manufacturing Material	Die Casting Aluminum
Panel Weight (Kg)	8/12,3
Curve degree (curve model)	-10°,-5°,0°,5°,10°
Driver	ICND2153
Receiving card	Novastar A5S
Scan rate	1/16
Viewing Angle VxH(Deg)	160°/160°
Brightness (cd/ m2)	max 1000 nits
Operating temperature	-30 to +50 (C°)
Cooling System	Dissipation – Fanless
IP Rating	IP40 / IP20
Maintenance	Front and back service
Cabling system	CAT6
Management Sys	Novastar
Input power frequency	50 - 60 Hz
Input Voltage	110 ~ 240 Volt ±10%
Power Cons. (W/m2)	AWG 160
Power Cons. (W/m2)	Max 480




Floor and angle optional available

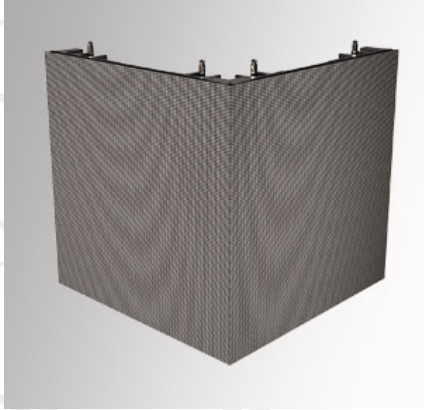

1mt and 0,5 mt available

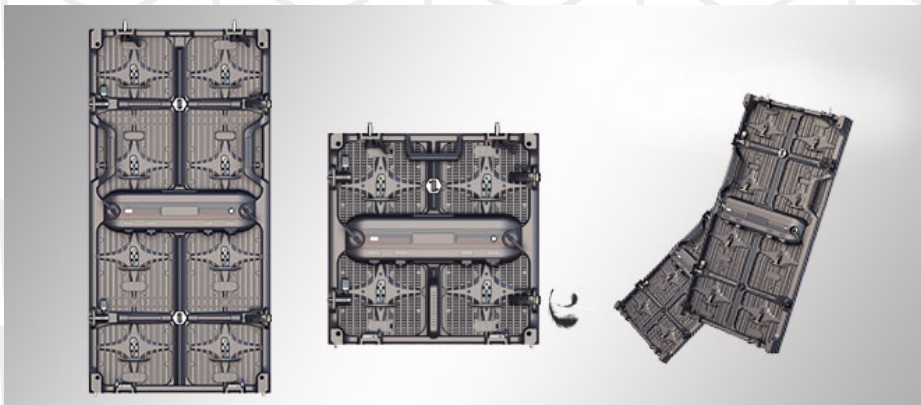

Curvable

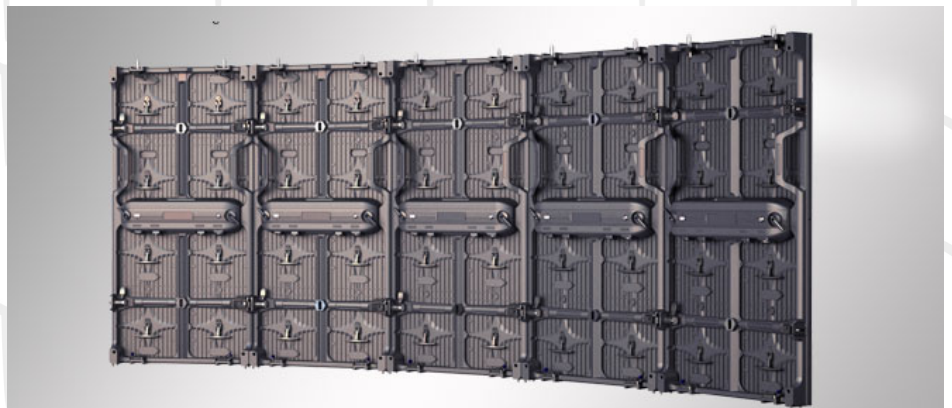



MODSART

YOUR TECHNOLOGY PARTNER

Commercializzato per l'Italia da Mods Art Srl
Via Marco Polo 44/46 - 66054 Vasto (CH)
www.modsart.it - info@modsart.it

I prodotti e tutte le informazioni contenute nel presente catalogo potrebbero subire modifiche senza preavviso