





INDOOR FLEX P5

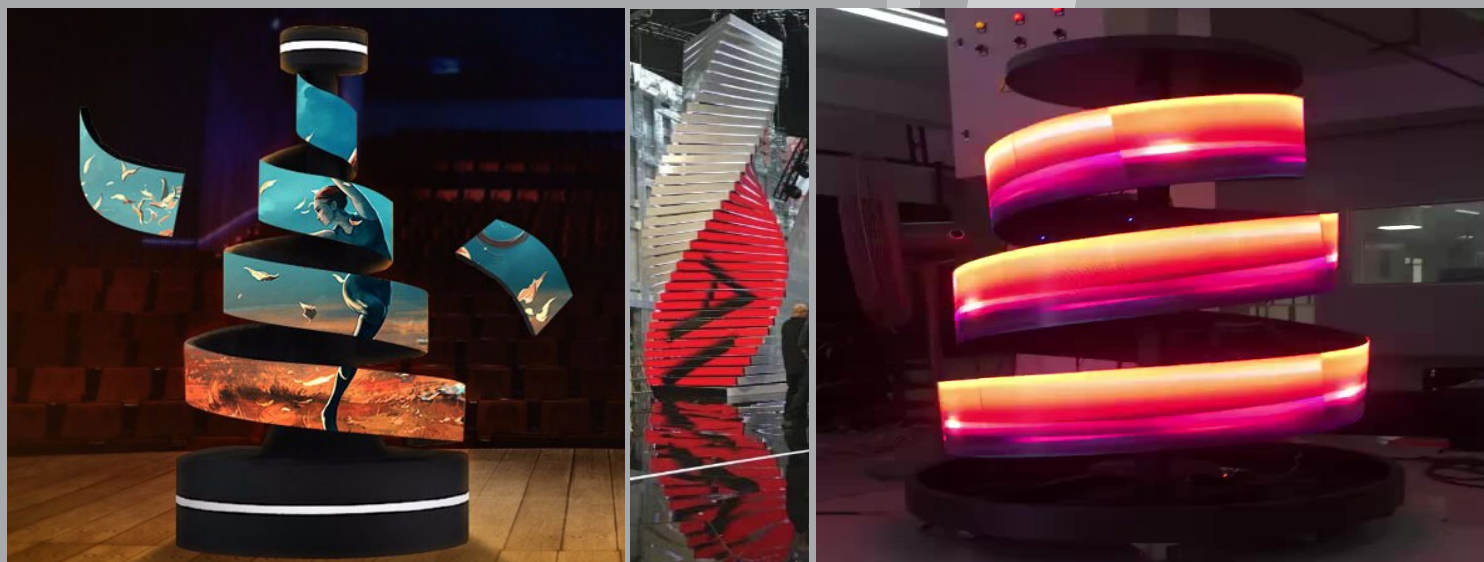


FEATURES

- SPECIALLY DESIGNED TO GUARANTEE CREATIVE INSTALLATIONS
- EXTRAORDINARY IMAGE LEVEL THANKS TO THE USE OF SMD LEDS AND HIGH QUALITY HARDWARE
- TORSION AND FLEXURAL RESISTANT
- SUITABLE FOR INDOOR USE
- RECOMMENDED RECEIVING CARD

MRV316

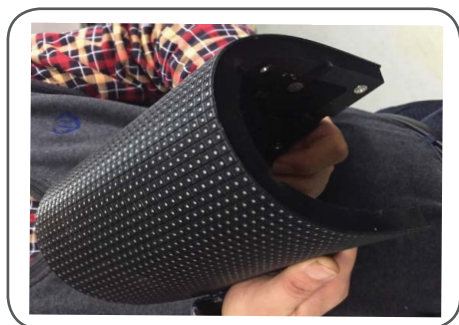

DATA & PARAMETER

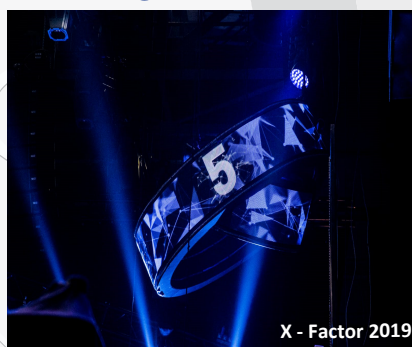

	FLEX P5			
Pixel pitch (mm)	5mm			
LED Type (SMD)	SMD2727 KN-LIGHTS			
LED Face Type	Black Face			
Pixel m ²	40.000			
Tile resolution (px)	64x32			
Dimension (mm)	320x160			
IP Grade	N.A (indoor)			
Manufacturing Material	ABS			
Tile Weight (Kg)	0,303			
Refresh Rate (Hz)	1920 up to 3840			
Signal Processing	16 Bit			
Colour Range	16.7 Million Colours			
Colour Temperature	3500K - 9500K			
Vertical Viewing Angle (Deg)	120			
Horizontal Viewing Angle (Deg)	160			
Brightness (cd/ m2)	1000			
Power Cons. (W/m ²) Max	480			
Power Cons. (W/m ²) AWG	240			
Operating temperature (C°)	-20 to 50 °C			
Ambience humidity	10% - 90%			
Lifetime (50% Brightness)	100.000 h			
MTBF	> 10.000 h			
Data Transfer Method	RJ45 max 70m - Opti al Fiber Max 500m (Multimode)			
Power Supply	VAC 110-220 to 5V-60A			
Certifications	CE - RoHS		120° max - better 0-90°	

The technical technical data are subject to change without notice. Errors and omissions excepted. Version: starting from December 2019