





Video led Comet R3.9S

Pixel pitch (mm)	3,91
LED Type	SMD 3 IN 1 – SMD1921
Panel dimension (mm)	500 (W) x 500 (H) x 85(D) 500 (W) x 1000 (H) x 85(D)
Manufacturing Material	Die Casting Aluminum
Panel Weight (Kg)	8
Curve degree (curvemodel)	-10°, -5°, 0°, 5°, 10°
Driver	MBI 5252
Receiving card	Novastar A5S
Scan rate	1/16
Viewing Angle VxH(Deg)	160°/130°
Brightness (cd/ m2)	5000 nits
Operating temperature	-30 to +50 (C°)
Cooling System	Dissipation – Fanless
IP Rating	IP65 / IP54
Maintenance	Front and back service
Cabling system	CAT6
Management Sys	Novastar
Input power frequency	50 - 60 Hz
Input Voltage	110 ~ 240 Volt ±10%
Power Cons. (W/m2)	AWG 230
Power Cons. (W/m2)	Max 700

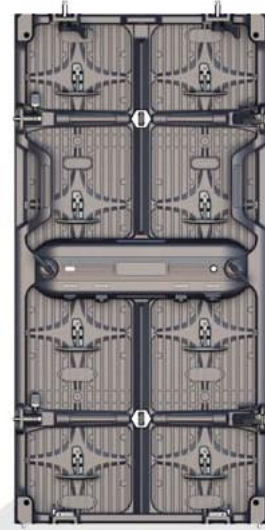


Video led Comet R4.8S

Pixel pitch (mm)	4,8
LED Type	SMD 3 IN 1 – SMD1921
Panel dimension (mm)	500 (W) x 500 (H) x 85(D) 500 (W) x 1000 (H) x 85(D)
Manufacturing Material	Die Casting Aluminum
Panel Weight (Kg)	8
Curve degree (curvemodel)	-10°, -5°, 0°, 5°, 10°
Driver	MBI 5252
Receiving card	Novastar A5S
Scan rate	1/13
Viewing Angle VxH(Deg)	160°/115°
Brightness (cd/ m2)	5000 nits
Operating temperature	-30 to +50 (C°)
Cooling System	Dissipation – Fanless
IP Rating	IP65 / IP54
Maintenance	Front and back service
Cabling system	CAT6
Management Sys	Novastar
Input power frequency	50 - 60 Hz
Input Voltage	110 ~ 240 Volt ±10%
Power Cons. (W/m2)	AWG 230
Power Cons. (W/m2)	Max 690




Video led Comet R5.9S


Pixel pitch (mm)	5,95
LED Type	SMD 3 IN 1 – SMD1921
Panel dimension (mm)	500 (W) x 500 (H) x 85(D)
Panel Res WxH (pixels)	84 x 84
Manufacturing Material	Aluminium
Panel Weight (Kg)	8
Driver	MBI 5252
Receiving card	Novastar A4S
Scan rate	1/16
Viewing Angle VxH(Deg)	160°/115°
Brightness (cd/ m2)	5000 nits
Operating temperature	-30 to +50 (C°)
Cooling System	Dissipation – Fanless
IP Rating	IP65 / IP54
Maintenance	Front and back service
Cabling system	CAT6
Management Sys	Novastar
Input power frequency	50 - 60 Hz
Input Voltage	110 ~ 240 Volt ±10%
Power Cons. (W/m2)	AWG 208
Power Cons. (W/m2)	Max 624

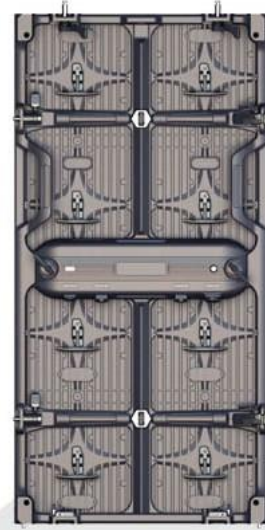

Floor and angle optional available

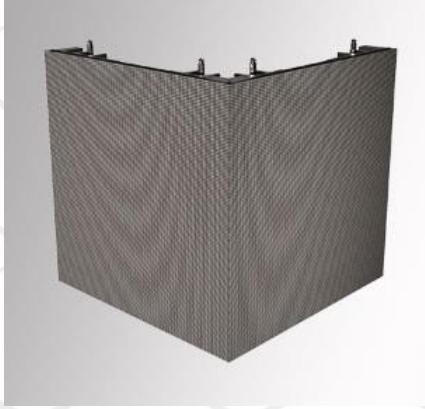

1mt and 0,5 mt available

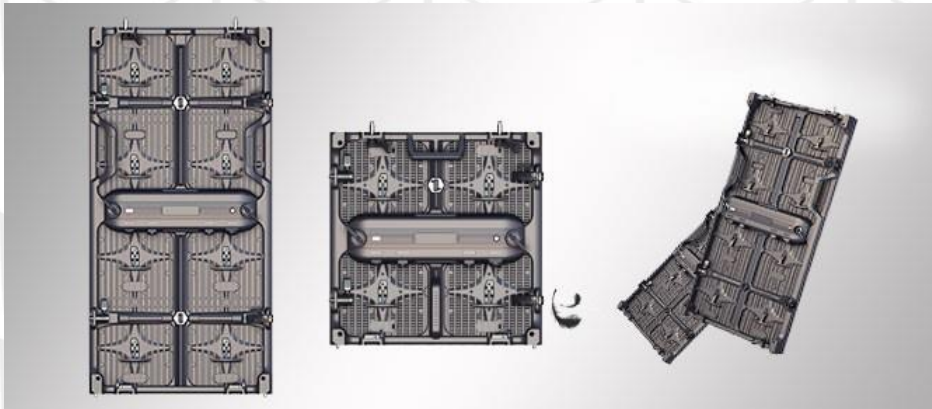

Curvable





MODSART

YOUR TECHNOLOGY PARTNER

Commercializzato per l'Italia da Mods Art Srl
Via Marco Polo 44/46 - 66054 Vasto (CH)
www.modsart.it - info@modsart.it

I prodotti e tutte le informazioni contenute nel presente catalogo potrebbero subire modifiche senza preavviso