

ACRONN
AV SOLUTIONS

ULTRAWAVE
Indoor & Outdoor



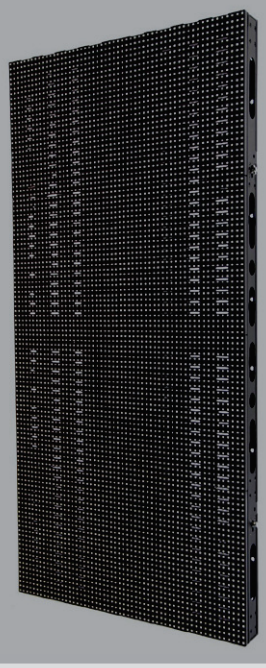

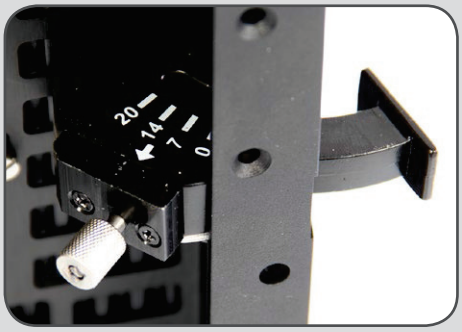

Bending angle adjustment



Docked Modules

KEY FEATURES

- DESIGNED TO PERFORM CURVED, CONVEX OR "SNAKE" SCREENS WITH AN ANGLE OF +7/- 20 DEGREES
- THE CABINET IS COMPLETELY MADE IN ALUMINUM
- THANKS TO FRONTAL IP65 PROTECTION GRADE, IT'S SUITABLE FOR OUTDOOR USES, BUT CAN ALSO BE USED AS AN INDOOR DISPLAY
- THE SPECIAL DESIGN WITH SEPARATED LED STRIPS MOUNTED ON A METALLIC FRAME, IN ADDITION TO LIGHTNESS (ONLY 25,6 KG/SQM) ENSURE A TRANSPARENCY OF 12%, ALLOWING LIGHT TO PASS THROUGH THE SCREEN SURFACE, PERMITTING A LOT OF CREATIVE EFFECTS

INDOOR · OUTDOOR · curved · transparency · IP65 · easy · FOR RENT

a product of:
EUROSELL S.P.A
Udine (UD) Italy
www.eurosell.it

DATA & PARAMETER

	ULW892	ULW892-C
Pixel pitch (mm)	8.928	
LED Type (SMD Indoor)	SMD 3535	
Pixel m²	12545	
Tile Dimension (mm)	500 (W) x 1000 (H) x 71 (D)	500 (W) x 500 (H) x 71 (D
Tile Resolution (pixels)	56 x 112	56 x 56
Manufacturing Material	Die-Casting Alluminium	
Tile Weight (Kg)	12.8	7
Refresh Rate (Hz)	600 - 2000	
Signal Processing	14 Bit	
Colour Range	281 Trillion Colours	
Colour Temperature	3500 - 9500K±500	
Vertical Viewing Angle (Deg)	140	
Horizontal Viewing Angle (Deg)	140	
Brightness (cd/ m2)	5000	
Power Cons. (W/m²) Max	600	
Power Cons. (W/m²) AWG	290	
Operating temperature (C°)	-20 to > +50	
Ambience humidity	10 % to 95%	
IP Protection	IP 65 Front/Back	
Lifetime (50% Brightness)	100000 h	
MTBF	> 10000 h	
Data Transfer Method	RJ45 max 70m - Optical Fiber Max 500m (Multimode)	
Power Supply	110 - 220 +/- 10%	
Certifications	CE - LVD - EMC - RoHS	

The specifications in this document are subject to change without prior notification.
Errors and omissions excepted. Version: from February 2014.